




PREMIUM HVAC SOFTWARE



Turbocor® compressors by Danfoss

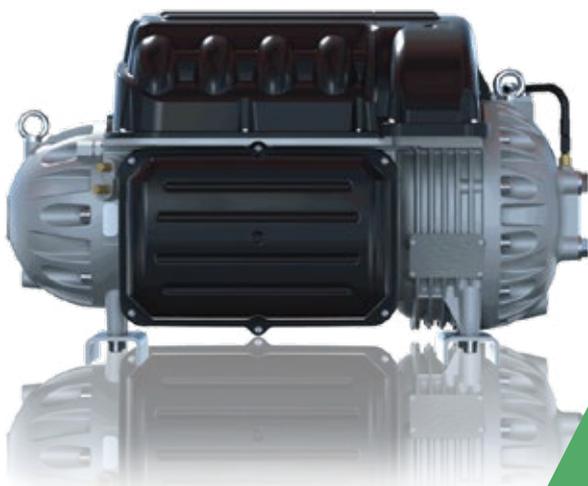

MAG-CHILL
HVAC software design



MAG-CHILL

HVAC software design



MAG-CHILL advanced design software for Turbocor® Chillers.

You are tasked with designing the most critical component of DATA CENTER or INDUSTRIAL PROCESS: **THE COOLING SYSTEM.**


The specifications are tight, the deadlines tighter, and the margin for error is zero. You need a tool that doesn't just calculate, but optimizes.

INTRODUCING MAG-CHILL:

the revolutionary software solution engineered exclusively for designing high-efficiency chillers powered by **Magnetic** (Turbocor® compressors by Danfoss) oil-free compressors. It's more than just design software, it's your direct access to a centralized, always-correct product ecosystem, eliminating guesswork and manual data cross-referencing.

It ensures precise thermal modeling, reliable system simulations, and energy-optimized configurations that meet the most demanding engineer expectations.

MAG-CHILL is the specialized design module of the IDEA SUITE HVAC, a comprehensive Product Information Management (PIM) system.

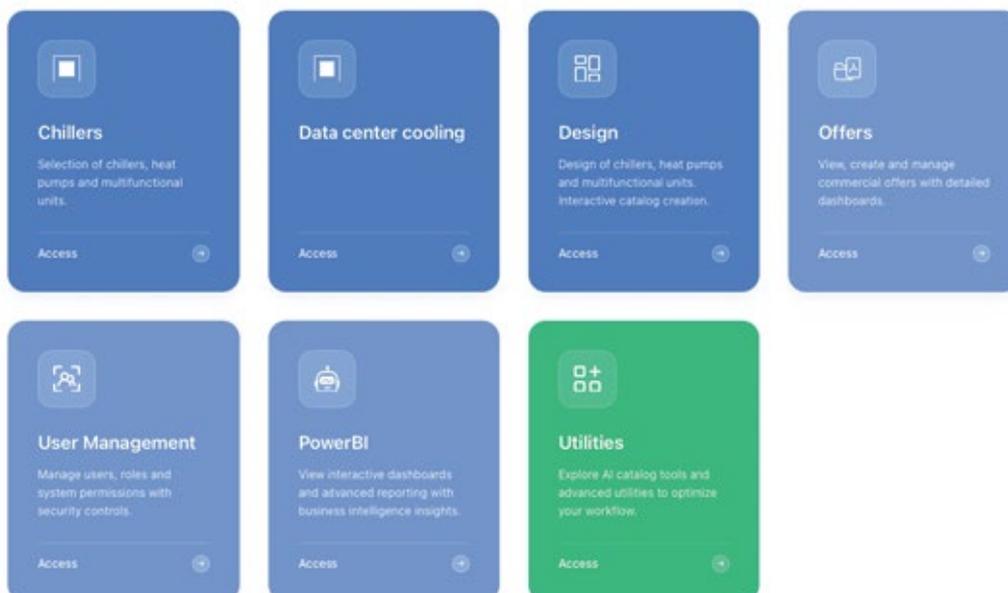

Design chillers faster. Smarter. More competitive.



NEW dimension in Chiller design

The Engineering Challenge: Data Silos vs. Optimal Design

Traditional chiller design often involves a fragmented process:

- Manually** cross-referencing datasheets from multiple suppliers.
- Risking** errors with outdated component performance curves.
- Wasting** valuable time on administrative tasks instead of innovation.
- Struggling** to generate consistent technical documentation for bids and production.

This disjointed approach creates bottlenecks, introduces risk, and stifles your ability to deliver the most competitive and efficient designs.

The screenshot displays the MAG-CHILL software interface for configuring a chiller. At the top, there are buttons for 'CALCULATE', 'CALCULATE SEER FOR ALL RESULT', and 'PRINT OPTIONS'. Below this is a table with columns for Name, P., and performance metrics (PI, Pa, Pa Tot, SEER, EER). The main area is divided into several tabs: 'DIAGRAM FAN', 'SENSITIVE DATA', 'PRINT PREVIEW', 'SEER', 'SEPR', 'IPLV', 'NPLV', and 'SCHEME'. The 'PRINT PREVIEW' tab is active, showing detailed specifications for various components:

- General:** Units number (1), Model (AC-1000_3-SP-2C-01), Refrigerant (R1234ze).
- Compressors:** Code compressor 1 (TGH285-H-3-ST-LL), Code compressor 2, Type (Turboacor).
- Fans:** Code (W30910KS3503), Type (Axial EC), Total air flow (194000 [m3/h]), Number (10 [N]), Absorbed power (28 [kW]), Absorbed current (53 [A]), Available static pressure (0 [Pa]).
- Condenser:** Code (P2508-04R-021-080-2000x1000-CUX-AL210), Type (Finned Pack), Number (10 [N]).
- Exchangers:** Code (FLS46.Q-4+658/2), Type (Flooded), Minimum water circuit content (0 [l]), Number (1 [N]).
- Dimensions:** Length (6610 [mm]), Width (2200 [mm]), Height (1800 [mm]).
- Electrical performances:** Power Supply (400/50/3 [V-ph-Hz]), Input power at full load (0 [kW]), FLA (526.2 [A]), RLA (526.2 [A]).
- Expansion valves:** (Section header visible).

Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



NEW dimension in Chiller design

MAG-CHILL transforms this challenge into a seamless, integrated workflow.

It is built from the ground up to leverage the unique performance characteristics of **Magnetic oil-free compressors** (Turboacor® compressors by Danfoss) giving you a decisive edge.

Developed for professional designers and HVAC manufacturers, MAG-CHILL combines scientific rigor with user-oriented intelligence.

Its advanced calculation engine and integration capabilities allow design teams to model every operating scenario- from full load to partial load- optimizing system efficiency, capacity control, and cost of ownership.

WHY ENGINEERS CHOOSE MAG-CHILL

Performance-oriented design with predictive efficiency optimization.

Real-time simulation of compressors, exchangers, and fans.

Full digital twin environment for system validation.

Integrated AI-based load prediction and automatic documentation.

1 FAMILIES 2 COMPONENTS 3 WORKING CONDITIONS 4 COMPARISON 5 ENERGETIC 6 PERFORMANCE 7 CART 8 CREATE MODEL

COOLING MODE HEATING MODE

air temperature [°C]			25	30	35										
Tin [°C]	Tout [°C]	Fluid	Pf [kW]	PaTot [kW]	EER	-	Pf [kW]	PaTot [kW]	EER	-	Pf [kW]	PaTot [kW]	EER	-	Pf [kW]
10	5	Water	632	177	3.57	⊗	651	207	3.14	⊗	662	247	2.68	⊗	742
11	6	Water	627	169	3.71	⊗	674	211	3.19	⊗	662	239	2.77	⊗	683
12	7	Water	634	166	3.82	⊗	657	197	3.34	⊗	684	243	2.81	⊗	695
13	8	Water	657	169	3.89	⊗	679	200	3.39	⊗	691	242	2.86	⊗	707
14	9	Water	648	161	4.02	⊗	673	191	3.52	⊗	704	239	2.95	⊗	718
15	10	Water	670	163	4.11	⊗	681	188	3.62	⊗	710	237	3	⊗	741
20	15	Water	634	127	4.99	⊗	711	171	4.16	⊗	756	218	3.47	⊗	794
25	20	Water	626	104	6.02	⊗	722	148	4.88	⊗	821	212	3.87	⊗	

Design chillers faster. Smarter. More competitive.




MAG-CHILL

HVAC software design



Connected to IDEA SUITE HVAC PIM SYSTEM

MAG-CHILL is part of the IDEA SUITE HVAC platform- a comprehensive Product Information Management (PIM) system specialized for the HVAC sector.

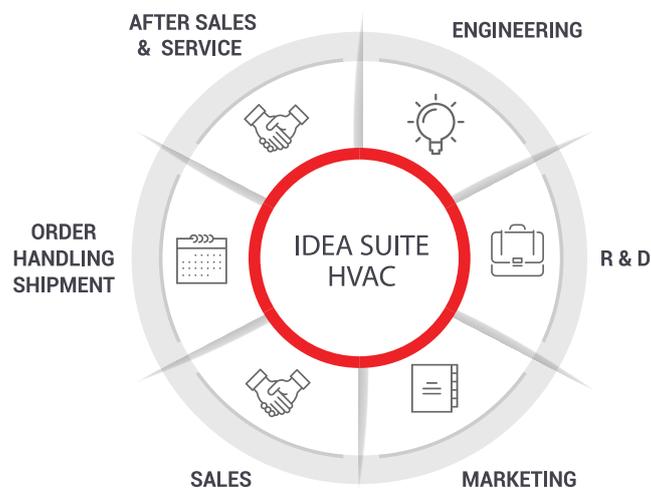

IDEA SUITE HVAC enables:

Centralized management of master data, technical specifications, and marketing content.

Automatic updates across engineering, sales, and after-sales departments.

Integrated content creation for brochures, price lists, and technical sheets.

Real-time data analysis using Power BI dashboards.

Multilingual material production for global teams.

By linking **MAG-CHILL** with IDEA SUITE, manufacturers and design offices can synchronize design data with marketing and operational content, ensuring consistency and efficiency across the entire product lifecycle.

[EXPLORE MORE- PIM](#)

Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



MAG-CHILL advanced design software- **ENGINEERED FOR PRECISION**

At the core of **MAG-CHILL** lies its **ENGINE**, a proprietary thermal model recognized for **calculation rigor, speed, and reliability**.

Calculation Methodology

- **Multi-zone heat exchanger** modeling based on NTU- ϵ and local balance equations, 10x more accurate calculations = zero costly errors during installation.
- **Real-time calculation of refrigerant properties** via CoolProp integration.
- **Full thermodynamic and transport property** resolution across subcooled, two-phase, and vapor regions.
- **Dynamic fan and compressor models** including Turbocor® technology.
- **Automatic optimization** of airflow, speed, and absorbed power.
- **Accurate expansion valve sizing** for all refrigerants and load conditions.

This approach allows users to simulate the true thermodynamic behavior of magchillers with exceptional precision, from startup to variable-load operation.

The screenshot displays the software's data table and schematic view. The table lists components and their specifications:

Name	P.	Pf	Pa	Pa Tot	SEER	EER	Compressor	Evaporator	Condenser	Fans				
[k...]	[k...]	[k...]	-	-			N...	M. N...	M. N...	M. N...				
AC-1000_3-SP-2C-01	0	1000	245	273	3.6	3.66	TGH...	4	FLS4...	1	P25...	10	W3G...	10

The schematic diagram shows a cycle with components: FANS, COILS, MAGNETIC COMPRESSORS, PLATE HEAT EXCHANGERS, and EXPANSION VALVE.

Component list and quantities:

Component	Quantity
Fans	
W3G910KS3503	10
Compressors	
TGH285-H-3-ST-LL	4
Condensers	
P2508-04R-021-080-2000x1000-CUX-AL210	10
Evaporators	
FLS46.Q.4+658/2	1
Expansion Valves	
ETS 500P-S	

Operating conditions:

Frequency	[Hz]	460.3
Evaporating Temperature	[°C]	22.71
Condensing Temperature	[°C]	62.58
Evaporating Pressure	[barg]	45.5
Condensing Pressure	[barg]	134.7

Explore more- *Thermodynamic Fundamentals Design*

Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



MAG-CHILL advanced design software- **ENGINEERED FOR PRECISION**

How it works for you?

- **Pre-Loaded, Always-Updated Turbocor® Libraries:** Access the latest, certified performance data, pressure-enthalpy diagrams, and operational limits for the entire Turbocor® compressor range directly within the software. No more searching for the correct PDF.
- **Intelligent System Optimization:** The software doesn't just size components; it models the entire chiller system. Automatically find the optimal setpoints for maximum efficiency (lowest kW/ton) at your specific operating conditions.
- **Automated Component Selection:** Instantly select compatible heat exchangers, valves, and system components from a validated, pre-approved database, ensuring reliability and performance.
- **Rapid "What-If" Scenario Analysis:** Test different operating conditions, refrigerants, or component combinations in seconds. Make informed, data-driven decisions to meet exact client requirements.

The screenshot shows the software interface with a progress bar at the top (1-8) and a 'RECALCULATE' button. Below is a comparison table for two chiller designs.

	AC-1000_3-SP-2C-01	AC-1000_3-SP-2C-02
General		
Units number	1	1
Model	AC-1000_3-SP-2C-01	AC-1000_3-SP-2C-02
Refrigerant	R1234ze	R1234ze
Compressors		
Code compressor 1	TGH285-H-3-ST-LL	TGH285-H-3-ST-LL
Code compressor 2		
Type	Turbocor	Turbocor
Number of circuits	[N°] 2	2
Number of compressors per circuits	[N°] 2	2
Total number	[N°] 4	4
Fans		
Code	W3001NK03002	W3001NK03002

Design chillers faster. Smarter. More competitive.



KEY FEATURES

- Advanced thermal and aerodynamic modeling with real-time optimization.
- Energy efficiency calculators with predictive analytics.
- Digital twin capabilities and load scenario simulation.

BENEFITS FOR ENGINEERING TEAMS

- **30–40% faster custom chiller design cycle.**
- **Up to 25% improvement in system energy performance.**
- **Simplified compliance** with latest energy efficiency standards.
- **Reduced risk of design errors** and full traceability of calculations.
- **Reliable documentation** automatically aligned with design updates.
- **Last minute:** client changes thermal specifications. With traditional methods, that means days of rework, with MAG-CHILL, some minutes.

PRODUCT FICHE according to European Regulation n°2016/2281: Information requirements for high temperature process chillers			
Model:	AC-1000_3-SP-2C-01		
Type of condensing:			Air
Refrigerant fluid:			R1234ze
	Item	Symbol	Value
			Unit
	Operating temperature	t	7
			°C
	Seasonal energy performance ratio	SEPR	5.23
			[-]
	Annual electricity consumption	Q	951192
			kWh/a
	Operating temperature	SEPR	5.23
			[-]
	Annual electricity consumption	Q	951192
			kWh/a
Parameters at full load and reference ambient temperature at rating point A (**)			
	Rated refrigeration capacity	PA	674.01
			kW
	Rated power input	DA	227.71
			kW
	Rated energy efficiency ratio	EERDC,A	2.96
			[-]
Parameters at rating point B			
	Declared refrigeration capacity	PB	626.83
			kW
	Declared power input	DB	155.16
			kW
	Declared energy efficiency ratio	EERDC,B	4.04
			[-]
Parameters at rating point C			
	Declared refrigeration capacity	PC	586.39
			kW
	Declared power input	DC	116.12
			kW
	Declared energy efficiency ratio	EERDC,C	5.05
			[-]
Parameters at rating point D			
	Declared refrigeration capacity	PD	539.21
			kW
	Declared power input	DD	88.98
			kW
	Declared energy efficiency ratio	EERDC,D	6.06
			[-]
Other items			
Capacity control		Variable	
Degradation co-efficient chillers (*)		Cdc	0.9
			[-]
GWP of the refrigerant			kg CO2 eq (100 years)
(*) If Cdc is not determined by measurement then the default degradation coefficient of chillers shall be 0.9.			
(**) For staged capacity units, two values divided by a slash (/) will be declared in each box in the section referring to 'refrigeration capacity' and 'EER'.			



MAG-CHILL

HVAC software design



ENERGETIC ANALYSIS

Results
Separated Combined **46 Results**

Efficiency

Average EER: **6.56**

Max P_f [kW]: **1000**

#	T. Air [°C]	UR [%]	P _f [kW]	P _a	EER
1	32	30	1000	247	4.05
2	31	30	1000	239	4.18
3	30	30	1000	232	4.31
4	29	30	1000	223	4.48
5	28	30	1000	217	4.61
6	27	30	1000	210	4.76
7	26	30	1000	204	4.9
8	25	30	1000	198	5.05
9	24	30	1000	193	5.18
10	23	30	1000	188	5.32

Min P_a [kW]: **119**

Total calculations: **46**

< Previous
Next >

1 FAMILIES
2 COMPONENTS
3 WORKING CONDITIONS
4 COMPARISON
5 ENERGETIC
6 PERFORMANCE
7 CART
8 CREATE MODEL

Selected models

AC-1000_3-SP-2C-01

General Data

Country / Region: **Germany**

State: **No states available**

City: **MUNICH-RIEM**

Economical Data

Currency: **EUR**

Price/kWh: **1,2**

Capacity

Duty [kW]: **1000**

Actions

Calculate

Create PDF

Reset

Results Table

#	T. Air [°C]	UR [%]	AC-1000_3-SP-2C-01		
			P _f [kW]	P _a [kW]	EER
1	-13.0	30	1000	119	8.4
2	-12.0	30	1000	120	8.33
3	-11.0	30	1000	121	8.26
4	-10.0	30	1000	122	8.2
5	-9.0	30	1000	123	8.13
6	-8.0	30	1000	124	8.06

Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



MAG-CHILL advanced design software for Turbocor® Chillers

Proven Benefits

Time Reduction  30–40% reduced design and engineering time	Operational Efficiency  Up to 25% higher operational efficiency for custom chillers	Regulations Compliance  Full compliance with energy and market regulations	Error-free Documentation  Reliable, error-free documentation aligned with design changes	User Permissions  Secure data governance with role-based user permissions
--	---	--	--	---

Your Direct Workflow Advantages

Feature	Your Benefit
Turbocor®-Optimized Algorithms	Design chillers that fully leverage the part-load efficiency and reliability of magnetic bearing compressors.
Centralized PIM Database	Eliminate hours of manual data entry and verification. All technical information is authoritative and up-to-date.
Automated Report Generation	Produce client-ready technical submittals and performance summaries in minutes, not hours.
Integrated System Analysis	Confidently predict real-world performance and energy consumption, strengthening your technical proposals.

Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



MAG-CHILL Software Design VS. Traditional Software Design

Traditional Method VS. MAG-CHILL

3-5 days design	4-8 hours
15% error risk	<1% errors
5 different software	All integrated

MARKET-DRIVEN INNOVATIONS

- **First design suite featuring AI-based cooling load prediction.**
- **Patented algorithms** optimizing efficiency at partial loads.
- **Cloud-based collaboration** among global engineering teams.

ARTIFICIAL INTELLIGENCE INTEGRATION

The embedded AI assistant supports design offices in several key areas:

- **Automatic creation** of technical and marketing texts for catalogues.
- **Instant multilingual translation** of component and system descriptions.
- **Consistent, error-free generation of reports** and documentation.

AI integration enhances productivity and accelerates project delivery, while ensuring coherence across all communication materials.



Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



MAG-CHILL Software Design VS. Traditional Software Design

GLOBAL FLEXIBILITY

- **Multilingual Environment-** Engineers can operate the full interface in multiple languages with automatic localization of terms, documentation, and catalogues.
- **Metric and Imperial Units-** Seamless unit adaptability ensures straightforward project adaptation for any regional standard or specification.
- **User Roles and Access Management-** MAG-CHILL offers configurable permissions for engineering, sales, and management users:
 - Technical engineers:** design, simulation, and data import.
 - Sales engineers:** selections, approval, and project quotations.
 - Marketing:** editing descriptions, pricing, and product content.
 - Administrators:** full control and data governance.

This structured system guarantees operational security, version control, and collaboration efficiency.

CATALOGUE



CHILLI A/C

Air cooled water chillers
free cooling system

R 134a



GENERAL		
Units number		1
Model		AC-1000_3-SP-2C-01
Refrigerant		R1234ze
COMPRESSORS		
Code compressor 1		T0405-H-3-ET-LL
Code compressor 2		
Type		Turbo
Number of shafts	[N]	2
Number of compressors per shaft	[N]	2
Total number	[N]	4
FANS		
Code		W020K03003
Type		Axial EC
Total air flow	[m ³ /h]	154000
Number	[N]	10
Absorbed power	[kW]	28
Absorbed current	[A]	63
Available static pressure	[Pa]	0
CONDENSER		
Code		P2008-049-021-000-2000x1000-CLK-
Type		Finned Pack
Number	[N]	10
EXCHANGERS		
Code		FLS46-Q-4-450-2
Type		Finned
Minimum water circuit content	[l]	0
Number	[N]	1
DIMENSIONS		
Length	[mm]	6810
Width	[mm]	2200
Height	[mm]	1800
ELECTRICAL PERFORMANCES		
Power Supply	[V _{ph} -Hz]	400/50/3
Input power at full load	[kW]	0
FLA	[A]	526.2
FLA	[A]	526.2
EXPANSION VALVES		
Model		ETS 500P-S

Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



MAG-CHILL PRECISION, EFFICIENCY, INTELLIGENCE

Empower your engineering team with the most advanced tool for designing Turbocor® chillers, built to shape the future of high-performance cooling systems in data centers and industrial environments.

Data Update Management

The system manages component information updates through a controlled and structured process:



Controlled Import:

Component data is imported using specialized tools integrated within the software. These tools are accessible exclusively to users with specific roles and appropriate permissions, ensuring that only qualified personnel can modify critical information.



Version Control:

The software automatically maintains a version registry for each component. This versioning system allows to:

- Track all changes made over time
- Compare different data versions
- Restore previous versions when necessary
- Maintain a complete audit trail of modifications



Approval Process:

The introduction of new data or modifications to existing data follows a structured approval workflow. This ensures that every update is verified and validated before being definitively applied to the system, reducing the risk of errors and maintaining data integrity.

This approach ensures quality, traceability, and security in component information management.



MAG-CHILL

HVAC software design



MAG-CHILL advanced design software for Turbocor® Chillers

Web-based Software



MAG-CHILL is a fully web-based software engine developed within the IDEA Suite HVAC ecosystem.

Security and Availability (Cloud Trust)



All projects are securely stored in the cloud with version control, encrypted data exchange, and automatic backups.

Certifications and Reliability




Validated according to ASHRAE and Eurovent methodologies, ensuring calculation reliability and compliance with international standards.

Training and Technical Support



Comprehensive onboarding, training, and dedicated technical support ensure your team achieves maximum productivity from day one.

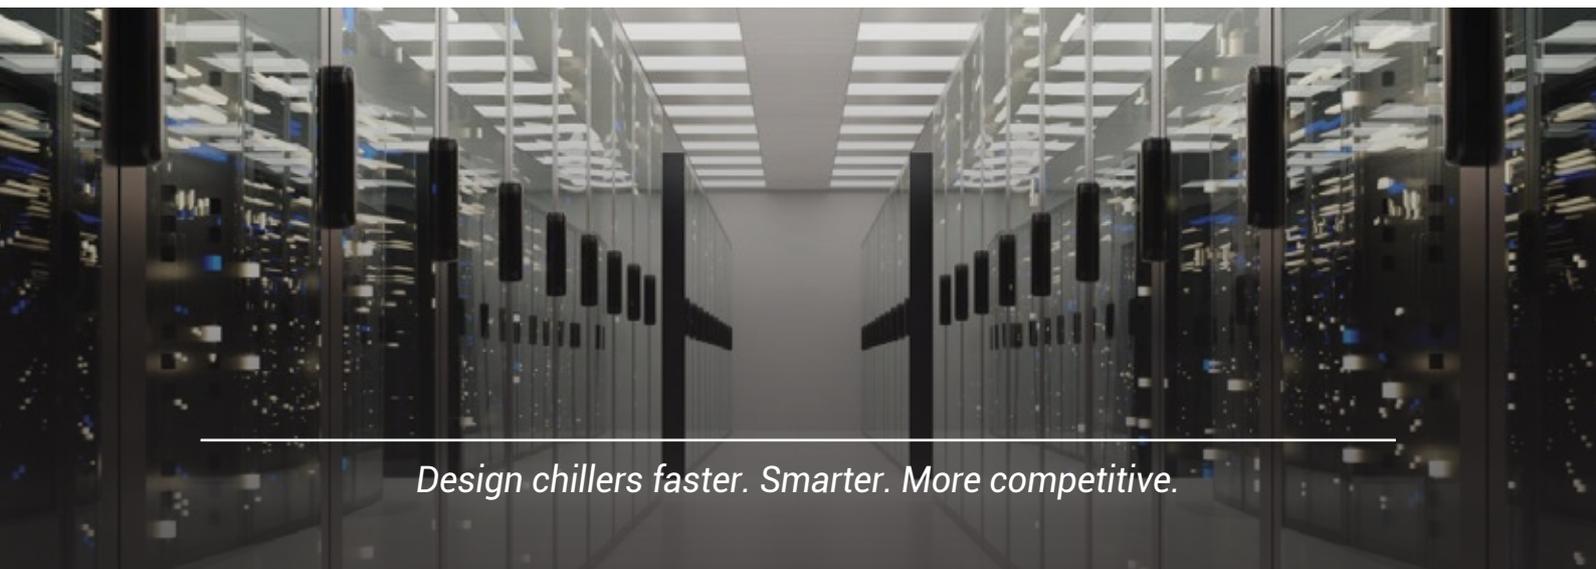

Design chillers faster. Smarter. More competitive.



MAG-CHILL
HVAC software design

READY TO TRANSFORM YOUR DESIGN PROCESS?

Move beyond outdated design methods.

With **MAG-CHILL** and the IDEA SUITE HVAC, you are not just designing a chiller, you are engineering a validated, optimized, and fully documented system with unparalleled efficiency.

Take the next step in engineering excellence.

Contact us today for a personalized demo and see how **MAG-CHILL** can streamline your workflow and elevate your chiller designs.

MAG-CHILL SOFTWARE of the IDEA SUITE HVAC Ecosystem.

Engineering Confidence. Delivering Efficiency.



Design chillers faster. Smarter. More competitive.



MAG-CHILL

HVAC software design



CONTACT US:

www.idealholding.net

support@idealholding.biz

LinkedIn



Design chillers faster. Smarter. More competitive.